

Nouveau Apollo



0345 222 1544
www.dctuk.com

Table of content



03

Product features

04

The colours

05

Resistant

06

Certifications

07

Fitting Projects

09

Specifications

Product features

✓ 50cm x 50cm carpet tiles

✓ Durable and strong nylon material

✓ Ideal for commercial spaces

✓ 'A' rating for castor chair use

✓ 7 year guarantee

✓ Manufactured in the EU

✓ Delivered next working day


✓ 6 colours available

The colours

The Nouveau Connections range is the perfect way to transform your workplace or home without breaking the bank. These amazing carpet tiles are available in 6 different colourways and they are delivered in the next working day!



Dark Matter

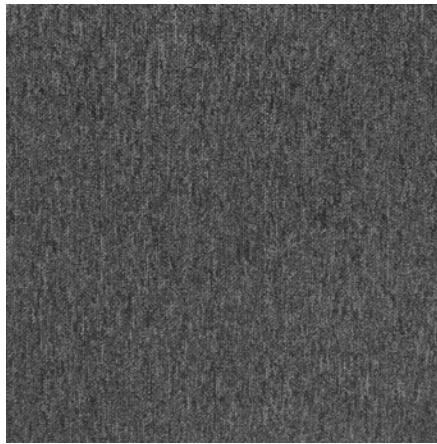

Galaxy Grey



Milky Way



Moon Grey



Solar Blue



Storm Blue

Resistant



Let us launch you into a world of intergalactic nylon carpet tiles, that are out of this world! This superb 50cm x 50cm nylon carpet tile range will transform any space for the better, and give you a solid, durable carpet choice for your next interior project. Featuring a tufted loop pile and boasting a thickness of 6mm, Nouveau Apollo is ready to transform your atmosphere!

**Affordable and resistant.
Do you want any better than
this?!**

Certifications



Manufactured in Belgium, the land of waffles, Nouveau Apollo passes all EU certifications including fire resistant and castor chair A rating (the highest you can get). Plus it has a 7 year guarantee and because it's nylon, has excellent anti-static properties. Perfect for any commercial environment, these tiles are delivered rocket fast and fitted by our extra-terrestrial fitting team, what are you waiting for?

Would you like to see it in a different kind of space?



[Use our visualiser](#)

Fitting projects

Whether you need to renovate your home or office, or if you are in charge of renovating a schoolroom or airport, DCTUK is here for you! Our fitting teams will take care of everything so your home or workspace will be ready to show off to lots of envious eyes before you know it.

We want to make our customers' life easier; your satisfaction matters most - we're always available at any time by phone call or email. You can see below some projects completed using our very own Nouveau Connections Stripe. Take a look. You won't be disappointed.

Atlantic, Wetherby



Learn more about this product



[Watch a youtube video](#)

Fitting for the home

What we do

- ✓ Straight lay (all products)
- ✓ Uplift/dispose of existing flooring
- ✓ Recycling of existing flooring
- ✓ Subfloor preparation
- ✓ Evenings & Weekends
- ✓ Cap & cove for vinyl



Fitting for the workplace

What we do

- ✓ Straight lay (all products)
- ✓ Uplift & dispose existing flooring
- ✓ Recycling of existing flooring
- ✓ Moving furniture
- ✓ Subfloor preparation
- ✓ Free design service
- ✓ Free site survey
- ✓ Evenings and weekend work
- ✓ Cap & cove for vinyl
- ✓ Others



Specifications

1/10" loop pile / 1/10" poil bouclé / 1/10" Schlingenpol / 1/10" lussenpool

PILE MATERIAL
COMPOSITION DU VELOURS
POLMATERIAL
POOLMATERIAAL

100% PA6 Solution Dyed Nylon

SECONDARY BACKING
DOSSIER
RÜCKEN
TAPIJTRUG

Back2Back : Modified bitumen

TOTAL WEIGHT
POIDS TOTAL
GESAMTGEWICHT
TOTAAL GEWICHT

Ca. 4.250g/m²

PILE WEIGHT
POIDS DU VELOURS
POLGEWICHT
POOLGEWICHT

Ca. 273g/m²

PILE ABOVE BACKING
POIDS DE VELOURS UTILE
POLNUTZSCHICHTGEWICHT
NUTTIG POOLEGEWICHT

Ca. 7mm

TOTAL HEIGHT
HAUTEUR TOTALE
GESAMTHÖHE
TOTAAL HOOGTE

Ca. 6,0mm

PILE HEIGHT
HAUTEUR DU VELOURS
FLORHÖHE
POOLHOOGTE

Ca. 2,5mm

PILE DENSITY
DENSITÉ DU VELOURS
POLROHDICHTE
POOLDICHTHEID

Ca. 0,110g/cm²

TUFT DENSITY
NOMBRE DE TOUFFES
NOPPENZAHL
AANTAL NOPPEN

Ca. 176.000/m²

CLASSIFICATION
CLASSEMENT
KLASSIFIKATION
CLASSIFICATIE

EN 1307 33 – LC1

CASTOR CHAIR SUITABILITY
CHAISE À ROULETTES
STUHLROLLENEIGNUNG
ROLSTOELGESCHIKTHEID

EN 985

FIRE RESISTANCE
COMPORTEMENT AU FEU
BRENNVERHALTEN
BRANDGEDRAG

Bfl -s] (EN 13501 – 1)

FASTNESS TO LIGHT
SOLIDITÉ À LA LUMIÈRE
LICHTECHTHEIT
LICHTECHTHEID

ISO 105-B02 ≥ 7

RUBBING FASTNESS
SOLIDITE A LA LUMIERE
LICHTECHTHEIT
LICHTECHTHEID

ISO 105-X12 ≥ 4

COLOUR FASTNESS TO WATER
SOLIDITÉ À L'EAU
WASSERECHTHEIT
WATERECHTHEID

EN ISO 105-E01 ≥ 4

THERMAL RESISTANCE
RÉSISTANCE THERMIQUE
WÄRMEDURCHLASSWIDERSTAND
WARMTEDOORLAATWEERSTAND

ISO 8302 – 0,067m²K/W

IMPACT NOISE RATING
ISOLATION PHONIQUE
TRITTSCHALLVERBESSERUNG
GELUIDSISOLATIE

ISO 10140 ΔL_w : 24dB ISO

SOUND ABSORPTION
ABSORPTION PHONIQUE
SCHALLABSORPTIONSGRAD
GELUIDSABSORPTIE

ISO 354 aw: 0,15

PERMANENTLY ANTISTATIC
ANTISTATIC PERMANENT
PERMANENT ANTISTATISCH
PERMANENT ANTISTATISCH

ISO 6356 $\leq 2\text{kV}$

TRANSVERSAL RESISTANCE
RESISTANCE TRANSVERSALE
DURCHGANGSWIDERSTAND
DOORGANGSWEERSTAND

ISO/DIS 10965 $\leq 10^9$ Ohm

SIZE
DIMENSIONS
ABMESSUNG
AFMETINGEN

50 x 50cm


PACKAGING
EMBALLAGE
VERPACKUNG
VERPAKKING

Box: 5m² - Pallet: 20 boxes

DIMENSIONAL STABILITY
STABILITE DIMENSIONNELLE
DIMENSIONSSTABILITÄT
DIMENSIONALE STABILITEIT

EN 986 max. 0,2%



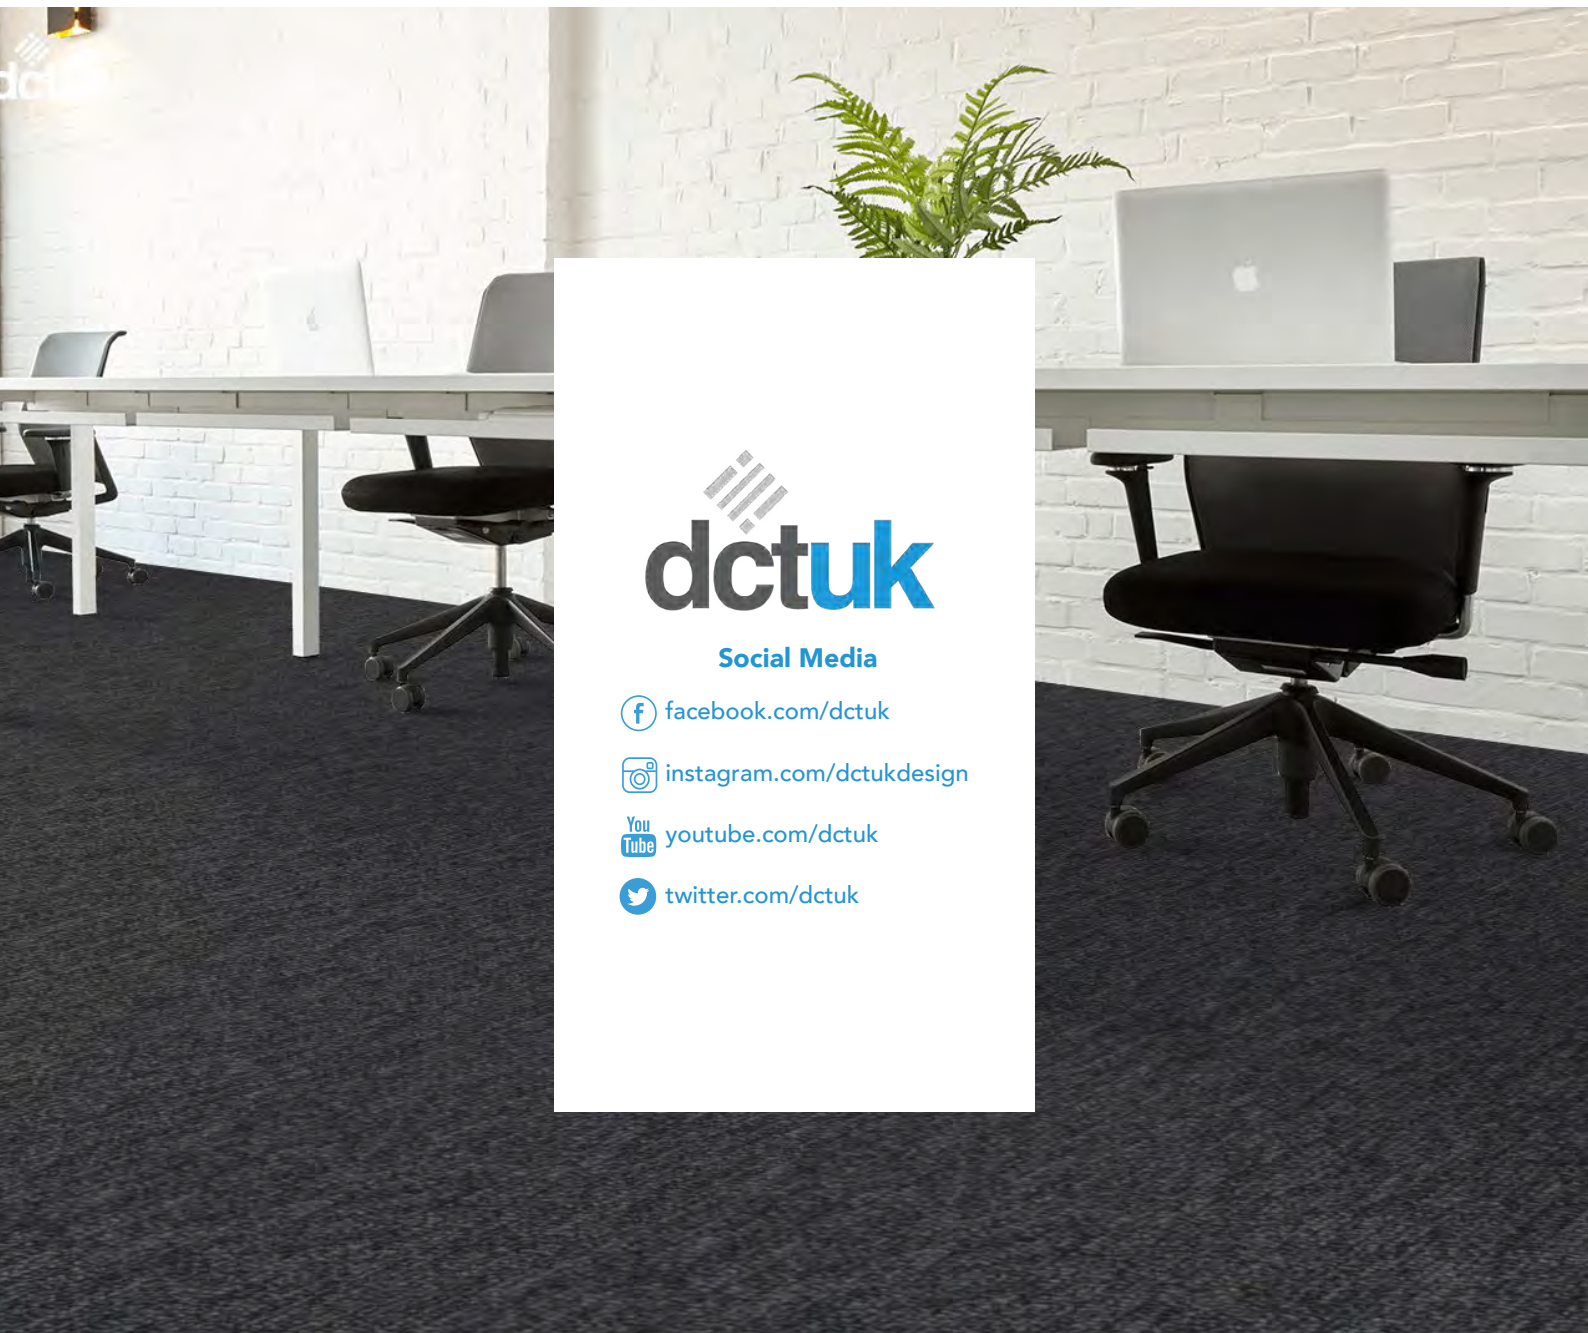

Social Media

 facebook.com/dctuk

 instagram.com/dctukdesign

 youtube.com/dctuk

 twitter.com/dctuk

0345 222 1544
www.dctuk.com