

**Nouveau
Drift**



0345 222 1544
www.dctuk.com

Table of content



03

Product features

04

The colours

05

Combinations

06

Stylish and resistant

08

Specifications

Product features

✓ 50cm x 50cm carpet tiles

✓ 13 solid colours

✓ Pair up with Nouveau Shift for gradient effects

✓ Nationwide fitting available

✓ Fire resistant properties


✓ Perfect for large commercial spaces

The colours

Nouveau Drift away to a land of sweet dreams, knowing you have chosen the right carpet tile. It comes in 13 different colourways, there is a colour for every different project vision and can be installed for you by our fitting team.




Beige



Black



Copper




Dark Blue



Dark Grey




Green Grass




Grey




Light Grey




Moss




Purple Rain



Red Berry



Sea Blue



Sunshine

Combinations

Nouveau Shift

Block colours are extremely versatile and can be as subtle or as statement as you like but sometimes, you need something a little more exciting. Nouveau Shift was specifically thought to combine with Nouveau Drift. It gives you the gradient needed to shift from one colour to another. The limit is your imagination.

Ever had that super awkward moment of walking into a meeting thinking it's just a free table? Well, problem solved. Why not use Nouveau Shift to zone out different areas? So, pop down one colour of Nouveau Drift to show the meeting tables, and pop another colour down for walkways / other areas using Nouveau Shift as the colour gradient tiles.



Want to learn more about it?



[Watch a youtube video](#)

Stylish and resistant



These commercial grade nylon, hard-wearing tiles are not only very stylish but come with a 15-year guarantee. Nouveau drift offers durability and effortless maintenance without any compromise on style. It will withstand the test of time and the trials of heavy traffic. What are you waiting for? Give our lovely sales team a ring!

Stylish and resistant carpet tiles. Do want any better than this?!

Fitting for the home

What we do


- ✓ Straight lay (all products)
- ✓ Uplift/dispose of existing flooring
- ✓ Recycling of existing flooring
- ✓ Subfloor preparation
- ✓ Evenings & Weekends
- ✓ Cap & cove for vinyl



Fitting for the workplace

What we do

- ✓ Straight lay (all products)
- ✓ Uplift & dispose existing flooring
- ✓ Recycling of existing flooring
- ✓ Moving furniture
- ✓ Subfloor preparation
- ✓ Free design service
- ✓ Free site survey
- ✓ Evenings and weekend work
- ✓ Cap & cove for vinyl
- ✓ Others

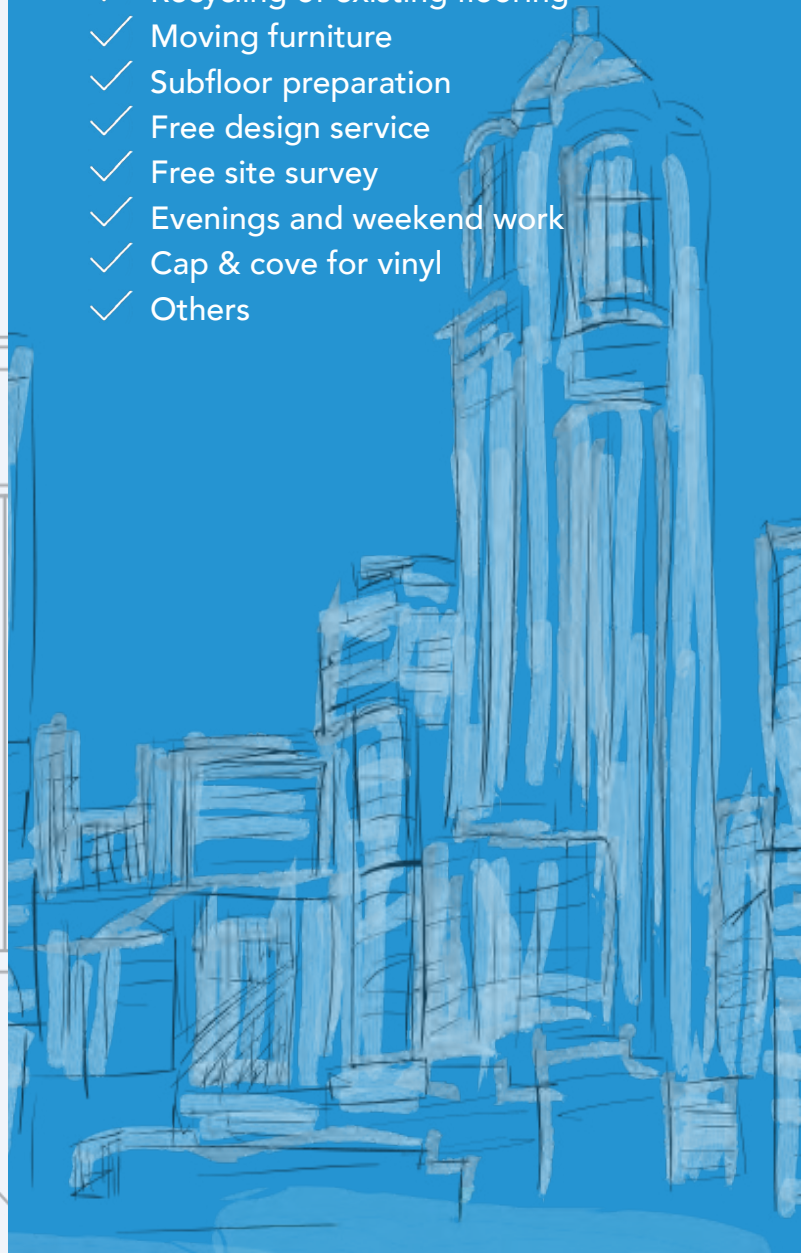

Specifications

1/12" loop pile / 1/12" poil bouclé / 1/12" Schlingenpol / 1/12" lussenpool

PILE MATERIAL COMPOSITION DU VELOURS POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon
SECONDARY BACKING DOSSIER RÜCKEN TAPIJTRUG	Back2Back: Modified bitumen
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4600g/m ²
PILE WEIGHT POIDS DU VELOURS POLGEWICHT POOLGEWICHT	Ca. 680g/m ²
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLEGEWICHT	Ca. 410g/m ²
TOTAL HEIGHT HAUTEUR TOTALE GESAMTHÖHE TOTALE HOOGTE	Ca. 7,7mm
PILE HEIGHT HAUTEUR DU VELOURS FLORHÖHE POOLHOOGTE	Ca. 3,7mm

PILE DENSITY
DENSITÉ DU VELOURS
POLROHDICHTE
POOLDICHTHEID

Ca, 0,100g/cm³

TUFT DENSITY
NOMBRE DE TOUFFES
NOPPENZAHL
AANTAL NOPPEN

Ca. 197.500/m²

CLASSIFICATION
CLASSEMENT
KLASSIFIKATION
CLASSIFICATIE

EN 1307 – Class 33

CASTOR CHAIR SUITABILITY
CHAISE À ROULETTES
STUHLROLLENEIGNUNG
ROLSTOELGESCHIKTHEID

EN 985 – A: Continuous use

FIRE RESISTANCE
COMPORTEMENT AU FEU
BRENNVERHALTEN
BRANDGEDRAG

EN 13501 – 1 - Bfl-s1

FASTNESS TO LIGHT
SOLIDITÉ À LA LUMIÈRE
LICHTECHTHEIT
LICHTECHTHEID

ISO 105-B02 - ≥7

RUBBING FASTNESS
SOLIDITE A LA LUMIERE
LICHTECHTHEIT
LICHTECHTHEID

EN ISO 105-X12 - ≥4

COLOUR FASTNESS TO WATER
SOLIDITÉ À L'EAU
WASSERECHTHEIT
WATERECHTHEID

EN ISO 105-E01 - ≥4

THERMAL RESISTANCE
RÉSISTANCE THERMIQUE
WÄRMEDURCHLASSWIDERSTAND
WARMTEDOORLAATWEERSTAND

ISO 8302 - 0.091 m²K/W

IMPACT NOISE RATING
ISOLATION PHONIQUE
TRITTSCHALLVERBESSERUNG
GELUIDSISOLATIE

ISO 10140 - ΔLw: 25 dB

SOUND ABSORPTION
ABSORPTION PHONIQUE
SCHALLABSORPTIONSGRAD
GELUIDSABSORPTIE

ISO 354 - Aw: 0,20

PERMANENTLY ANTISTATIC
ANTISTATIC PERMANENT
PERMANENT ANTISTATISCH
PERMANENT ANTISTATISCH

ISO 6356 - ≤ 2 kV

TRANSVERSAL RESISTANCE
RESISTANCE TRANSVERSALE
DURCHGANGSWIDERSTAND
DOORGANGSWEERSTAND

ISO/DIS 10965 - ≤ 1 x 10⁹ Ohm

SIZE
DIMENSIONS
ABMESSUNG
AFMETINGEN

50cm x 50cm


DIMENSIONAL STABILITY
STABILITE DIMENSIONNELLE
DIMENSIONSSTABILITAT
DIMENSIONALE STABILITEIT

EN 986

LEED®

Product contributes toward
satisfying Credits under LEED®.*



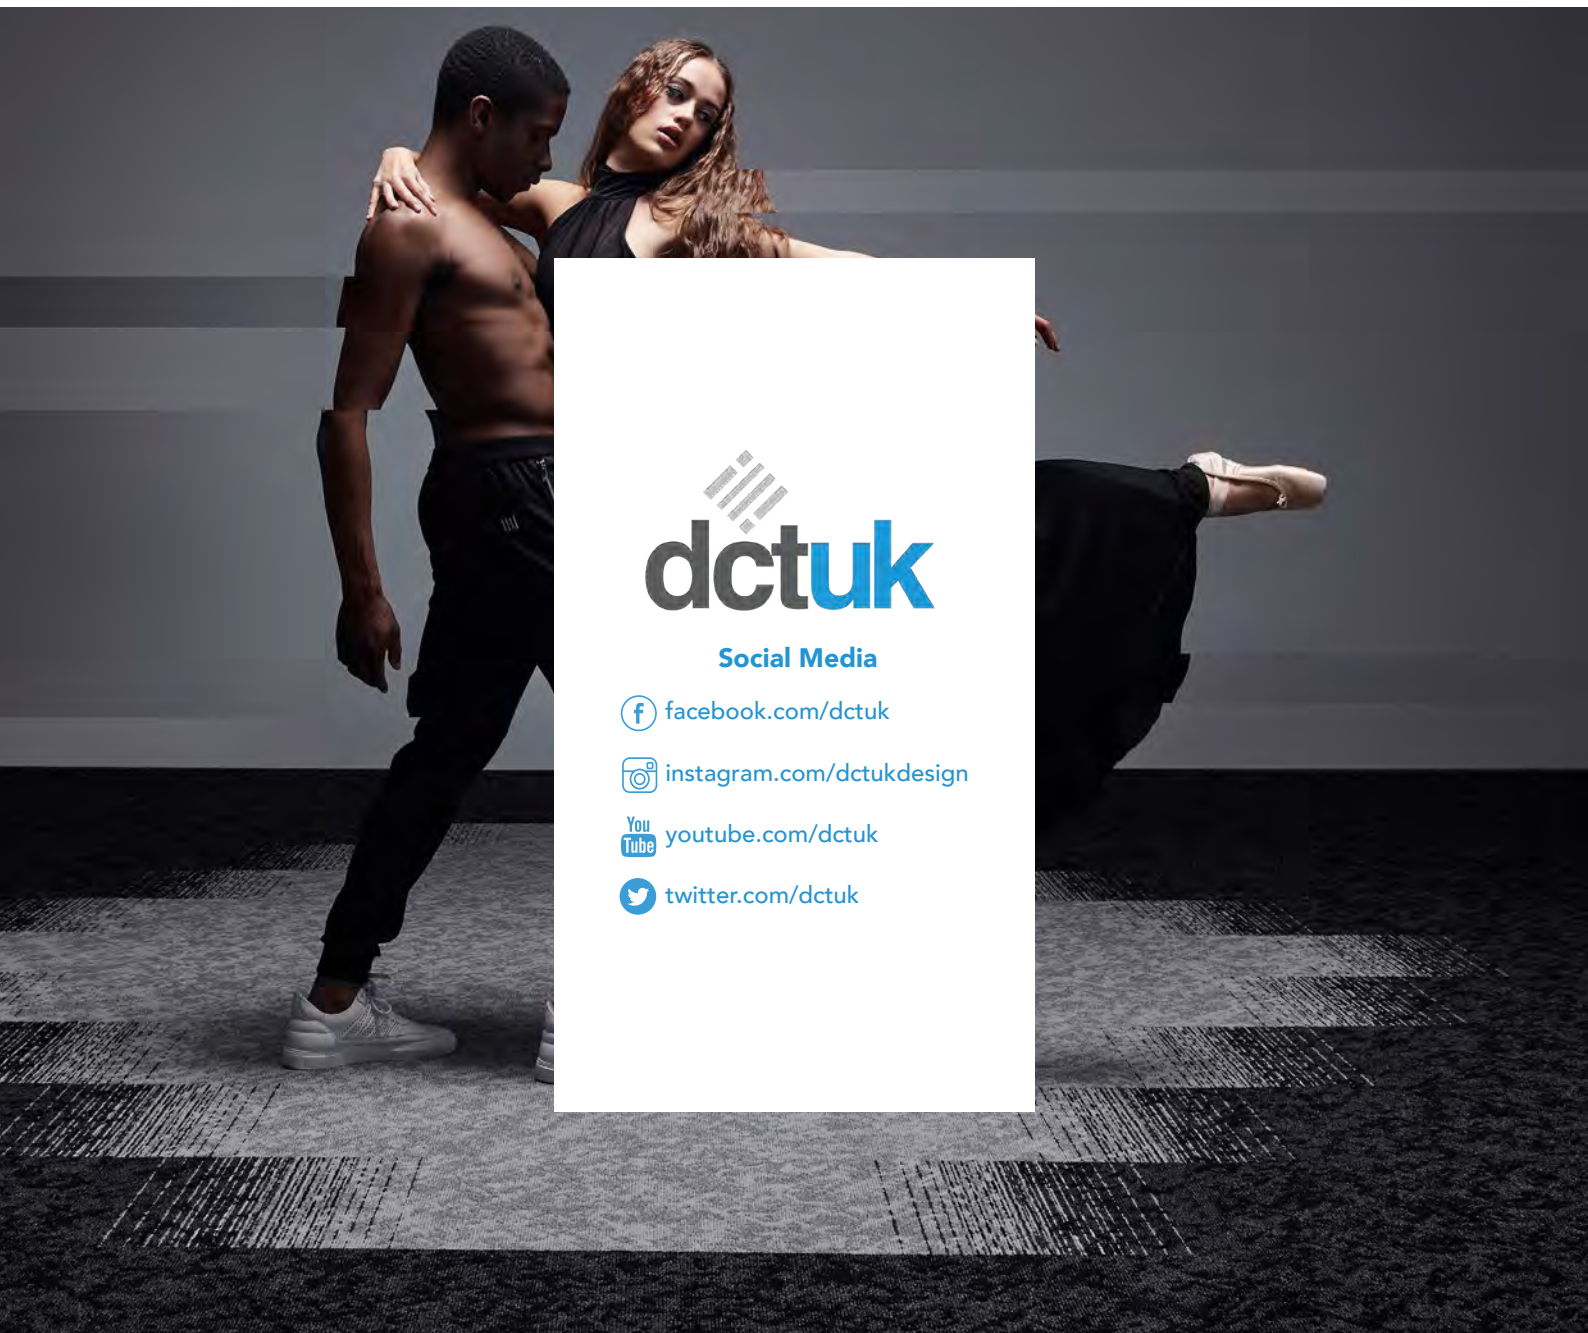

Social Media

 facebook.com/dctuk

 instagram.com/dctukdesign

 youtube.com/dctuk

 twitter.com/dctuk

0345 222 1544
www.dctuk.com