


Nouveau Linear



0345 222 1544
www.dctuk.com

Table of content

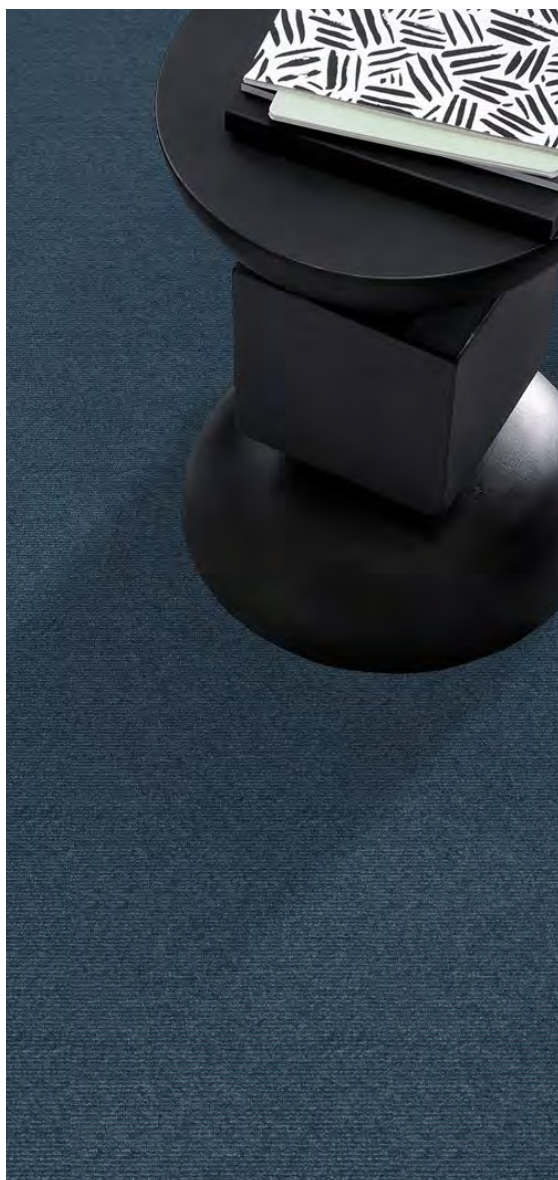

03

Product features

04

The colours

05

Combinations

06

Comfortable and resistant

07

Fitting

08

Specifications

Product features

✓ 50cm x 50cm carpet tiles

✓ Perfect for offices
and reception areas

✓ A+ BREEAM rating

✓ Perfect for bedrooms
and living rooms

✓ 10 year guarantee

✓ 100% recyclable

The colours

Make sure you walk the line when it comes to your project requirements with this stylish flooring solution. From Cypress Green to Charcoal Slate and Ocean Haze, this exclusive range is as hardwearing as the mossy mountains, the cobbled concrete and the sturdy ocean floor.



Charcoal Slate



Cypress Green



Nightshade Madison



Ocean Haze



Ocean Peacock



Ocean Turquoise

Combinations



Nouveau Connections

Here at DCTUK we believe the first sight impact is the most important, and for that, you can be sure Nouveau Connections is the best possible you could ever get for an amazingly affordable price! This range has 12 available colours, so you can combine it perfectly with Nouveau Linear. Both carpet tiles are ideal if you'd like to renovate your office or any other

commercial space, however, you can also use them in other spaces since they have an unquestionable durability.

Want to learn more about it?



Watch a youtube video



Read our blog

Comfortable and Resistant



Ethically-sourced and 100% recyclable, Nouveau Linear might take inspiration from Mother Nature but it also gives just as much back to our precious planet. A tufted loop pile construction makes for the perfect mix of comfort and performance. Comfortable underfoot and plush to the touch but with equal measures of endurance, Nouveau Linear was designed with large installations with lots of mobile members of staff in mind.

**Comfortable and resistant
carpet tiles. Do want any
better than this?!**

Fitting for the home

What we do


- ✓ Straight lay (all products)
- ✓ Uplift/dispose of existing flooring
- ✓ Recycling of existing flooring
- ✓ Subfloor preparation
- ✓ Evenings & Weekends
- ✓ Cap & cove for vinyl



Fitting for the workplace

What we do

- ✓ Straight lay (all products)
- ✓ Uplift & dispose existing flooring
- ✓ Recycling of existing flooring
- ✓ Moving furniture
- ✓ Subfloor preparation
- ✓ Free design service
- ✓ Free site survey
- ✓ Evenings and weekend work
- ✓ Cap & cove for vinyl
- ✓ Others

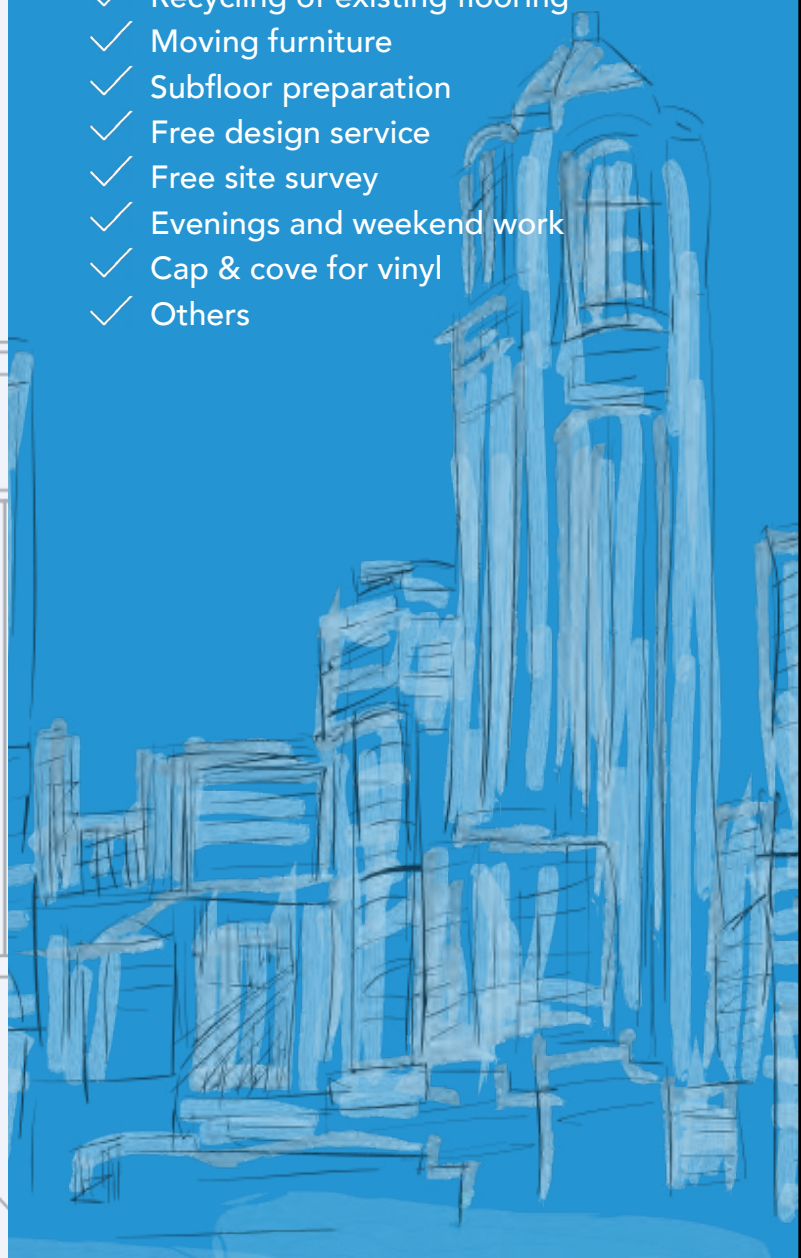

Specifications

1/10" loop pile / 1/10" poil bouclé / 1/10" Schlingenpol / 1/10" lussenpool

PILE CONTENT
COMPOSITION DU VELOURS
POLMATERIAL
POOLSAMENSTELLING

100% solution dyed polypropylene

SECONDARY BACKING
DOSSIER
RÜCKEN
TAPIJTRUG

Bitumen with glassfibre 3kg/m²

PILE HEIGHT
HAUTEUR DU VELOURS
FLORHÖHE
POOLHOOGTE

(ISO 1766) $\pm 3.5\text{mm}$

TOTAL HEIGHT
HAUTEUR TOTALE
GESAMTHÖHE
TOTALE HOOGTE

(ISO 1765) $\pm 6.3\text{mm}$

PILE WEIGHT
POIDS DU VELOURS
POLGEWICHT
POOLGEWICHT

(ISO 2424) $\pm 550\text{ gr./m}^2$

TOTAL WEIGHT
POIDS TOTAL
GESAMTGEWICHT
TOTAAL GEWICHT

(ISO 8543) $\pm 4390\text{ gr./m}^2$

SIZE
DIMENSIONS
ABMESSUNG
AFMETINGEN

50 cm x 50 cm

CASTOR CHAIR SUITABILITY
CHAISE À ROULETTES
STUHLROLLENEIGNUNG
ROLSTOELGESCHIKTHEID

(EN 985 / A) > 2.4

PERMANENTLY ANTISTATIC
ANTISTATIC PERMANENT
PERMANENT ANTISTATISCH
PERMANENT ANTISTATISCH

Yes

DIMENSIONAL STABILITY
STABILITE DIMENSIONNELLE
DIMENSIONSSTABILITAT
DIMENSIONALE STABILITEIT

(ISO 2551) < 0.2%

IMPACT NOISE RATING
ISOLATION PHONIQUE
TRITTSCHALLVERBESSERUNG
GELUIDSISOLATIE

(ISO 140-8) 24 dB

SOUND ABSORPTION (Hz)
ABSORPTION PHONIQUE (Hz)
SCHALLABSORPTIONSGRAD (Hz)
GELUIDSABSORPTIE (Hz)

500	1000	2000	4000
0,07	0,19	0,28	0,32

FIRE RESISTANCE
COMPORTEMENT AU FEU
BRENNVERHALTEN
BRANDGEDRAG

(ISO 13501-01) Cfl-S!

FASTNESS TO LIGHT
SOLIDITÉ À LA LUMIÈRE
LICHTECHTHEIT
LICHTECHTHEID

(ISO 105 B02) ≥ 6

COLOUR FASTNESS TO WATER
SOLIDITÉ À L'EAU
WASSERECHTHEIT
WATERECHTHEID

(ISO 105 E01) 5

RUBBING FASTNESS
SOLIDITE A LA LUMIERE
LICHTECHTHEIT
LICHTECHTHEID

(ISO 105 X12) 5



Social Media

 facebook.com/dctuk

 instagram.com/dctukdesign

 youtube.com/dctuk

 twitter.com/dctuk

0345 222 1544
www.dctuk.com