

Nouveau Trio



0345 222 1544
www.dctuk.com

Table of content



03

Product features

04

The colours

05

Combinations

06

Stylish and Resistant

07

Fitting

08

Specifications

Product features

✓ 50cm x 50cm carpet tiles

✓ Perfect for heavy traffic areas

✓ Specially made to be hardwearing

✓ Helps reduce excess noise

✓ Easy to clean and replace individual tiles

✓ Buying online? Order in multiples of 20 tiles

The colours

Looking for a hardwearing carpet tile? You've come to the right place with Nouveau Trio carpet tiles. Available in 7 versatile colourways, there's something to suit any small business or large commercial interior.



Dos



One



Three



Tres



Triple



Two



Uno

Combinations

Nouveau Apollo

Block colours are extremely versatile and can be as subtle or as statement as you like but sometimes, you need something a little more exciting, so why not mixing one block colour carpet tile with another one with an irreverant design? Nouveau Apollo is available in 6 colours that will look amazing with Nouveau Trio.

Ever had that super awkward moment of walking into a meeting thinking it's just a free table? Well, problem solved. Why not use Nouveau Apollo to zone out different areas? So, pop down Nouveau Trio to show the meeting tables, and pop Nouveau Apollo down for walkways / other areas.



Want to learn more about it?



Watch a youtube video

Stylish and resistant



One part tufted loop, one part tough bitumen backing and one part stylish design. Together these make the perfect trio. This classic carpet tile range is specifically made to be hardwearing making your flooring decision as easy as 1, 2, 3. Nouveau Trio is a winning contender for offices, schools and other heavily populated spaces such as reception areas and corridors.

**Stylish and resistant
carpet tiles. Do want any
better than this?!**

Fitting for the home

What we do


- ✓ Straight lay (all products)
- ✓ Uplift/dispose of existing flooring
- ✓ Recycling of existing flooring
- ✓ Subfloor preparation
- ✓ Evenings & Weekends
- ✓ Cap & cove for vinyl



Fitting for the workplace

What we do

- ✓ Straight lay (all products)
- ✓ Uplift & dispose existing flooring
- ✓ Recycling of existing flooring
- ✓ Moving furniture
- ✓ Subfloor preparation
- ✓ Free design service
- ✓ Free site survey
- ✓ Evenings and weekend work
- ✓ Cap & cove for vinyl
- ✓ Others

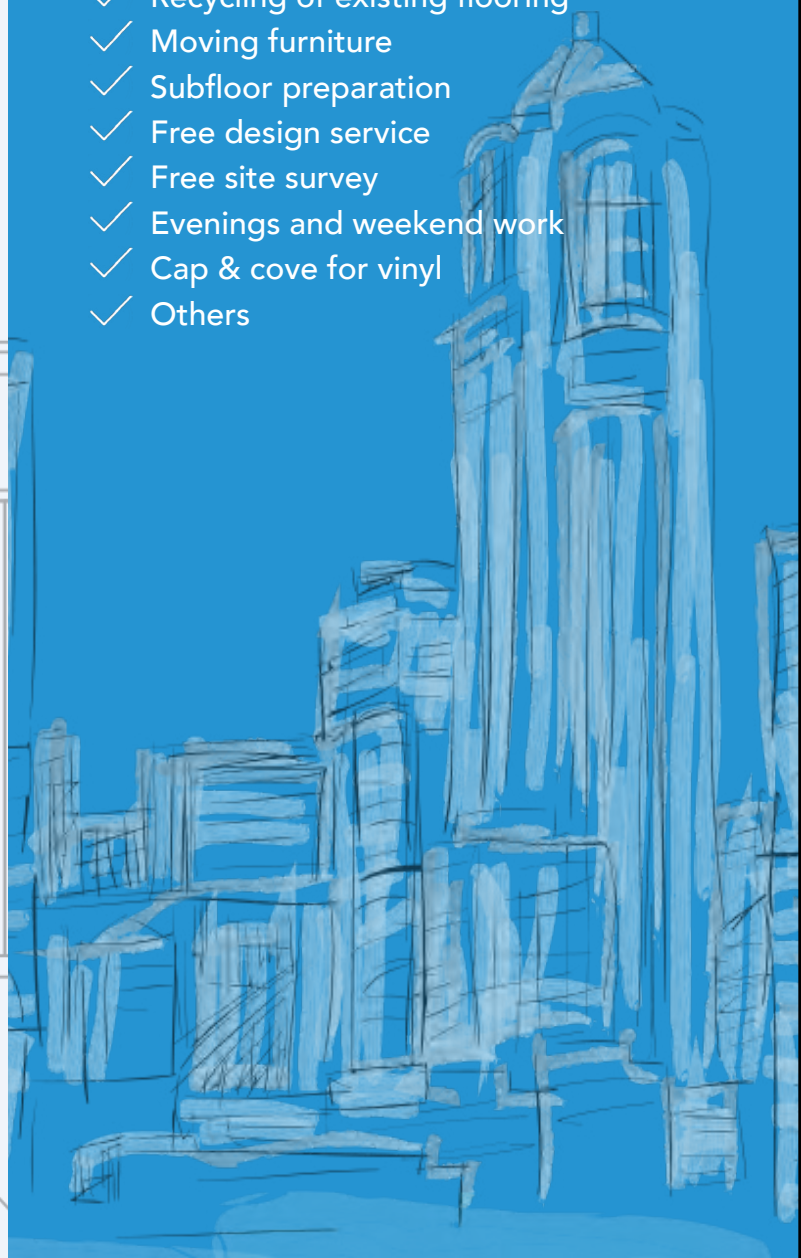

Specifications

1/10" loop pile / 1/10" poil bouclé / 1/10" Schlingenpol / 1/10" lussenpool

PILE MATERIAL
COMPOSITION DU VELOURS
POLMATERIAL
POOLMATERIAAL

100% PA6 Solution Dyed Nylon

SECONDARY BACKING
DOSSIER
RÜCKEN
TAPIJTRUG

Back2Back: Modified bitumen

TOTAL WEIGHT
POIDS TOTAL
GESAMTGEWICHT
TOTAAL GEWICHT

Ca. 4700g/m²

PILE WEIGHT
POIDS DU VELOURS
POLGEWICHT
POOLGEWICHT

Ca. 740g/m²

PILE ABOVE BACKING
POIDS DE VELOURS UTILE
POLNUTZSCHICHTGEWICHT
NUTTIG POOLEGEWICHT

Ca. 418g/m²

TOTAL HEIGHT
HAUTEUR TOTALE
GESAMTHÖHE
TOTAAL HOOGTE

Ca. 7,2mm

PILE HEIGHT
HAUTEUR DU VELOURS
FLORHÖHE
POOLHOOGTE

Ca. 3,5mm

PILE DENSITY
DENSITÉ DU VELOURS
POLROHDICHTHE
POOLDICHTHEID

Ca, 0,116g/cm³

TUFT DENSITY
NOMBRE DE TOUFFES
NOPPENZAHL
AANTAL NOPPEN

Ca. 158.500/m²

CLASSIFICATION
CLASSEMENT
KLASSIFIKATION
CLASSIFICATIE

EN 1307 – Class 33

CASTOR CHAIR SUITABILITY
CHAISE À ROULETTES
STUHLROLLENEIGNUNG
ROLSTOELGESCHIKTHEID

EN 985: Continuous use

FIRE RESISTANCE
COMPORTEMENT AU FEU
BRENNVERHALTEN
BRANDGEDRAG

EN 13501 – 1 - Bfl-s1

FASTNESS TO LIGHT
SOLIDITÉ À LA LUMIÈRE
LICHTECHTHEIT
LICHTECHTHEID

ISO 105-B02 - ≥7

RUBBING FASTNESS
SOLIDITE A LA LUMIERE
LICHTECHTHEIT
LICHTECHTHEID

EN ISO 105-X12 - ≥4

COLOUR FASTNESS TO WATER
SOLIDITÉ À L'EAU
WASSERECHTHEIT
WATERECHTHEID

EN ISO 105-E01 – ≥4

THERMAL RESISTANCE
RÉSISTANCE THERMIQUE
WÄRMEDURCHLASSWIDERSTAND
WARMTEDOORLAATWEERSTAND

ISO 8302 – 0.050m² K/W

IMPACT NOISE RATING
ISOLATION PHONIQUE
TRITTSCHALLVERBESSERUNG
GELUIDSISOLATIE

ISO 10140 – 36dB

SOUND ABSORPTION
ABSORPTION PHONIQUE
SCHALLABSORPTIONSGRAD
GELUIDSABSORPTIE

ISO 354 – 0.15

PERMANENTLY ANTISTATIC
ANTISTATIC PERMANENT
PERMANENT ANTISTATISCH
PERMANENT ANTISTATISCH

SO 6356 – 2kV

SIZE
DIMENSIONS
ABMESSUNG
AFMETINGEN

50cm x 50cm

DIMENSIONAL STABILITY
STABILITE DIMENSIONNELLE
DIMENSIONSSTABILITÄT
DIMENSIONALE STABILITEIT

EN 986 –max 0.2%

LEED®

Product contributes toward
satisfying Credits under LEED®.*





Social Media

 facebook.com/dctuk

 instagram.com/dctukdesign

 youtube.com/dctuk

 twitter.com/dctuk

0345 222 1544
www.dctuk.com