


Nouveau Vogue Air



0345 222 1544
www.dctuk.com

Table of content

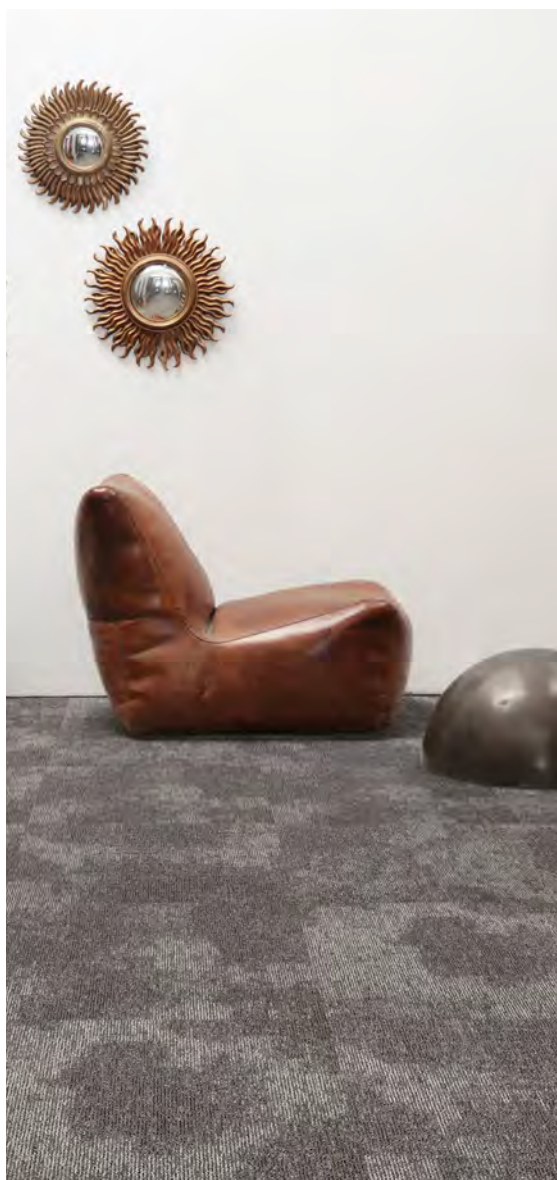

03

Product features

04

The colours

05

Combinations

06

Resistant

07

Fitting projects

09

Specifications

Product features

✓ 50cm x 50cm carpet tiles

✓ 12 breath-taking rustic colours

✓ Contemporary cloud-like design

✓ Won't wear or damage easily

✓ Fire resistant properties


✓ Class 33 wear quality

The colours

Walking across this air-inspired design is almost as if you're standing on your head on a winter's afternoon in Blighty, only without the blood rush to the head and subsequent dizziness. Soft tones drift by and add a sense of tranquil movement and soothing transience which is just perfect for reception areas and waiting spaces where calm is key.



Beige

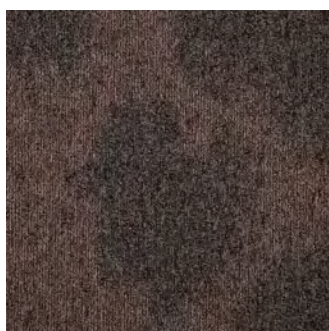

Brown



Cloud



Dark Blue



Dark Grey



Dark Matter




Grey



Light Grey




Red Oak



Sand



Stone



Washed Black

Combinations

Nouveau Apollo

Block colours are extremely versatile and can be as subtle or as statement as you like but sometimes, you need something a little more exciting, so why not mixing one block colour carpet tile with another one with an irreverant design? Nouveau apollo is available in 6 colours that will look amazing with Nouveau Vogue Air.

Ever had that super awkward moment of walking into a meeting thinking it's just a free table? Well, problem solved. Why not use Nouveau Apollo to zone out different areas? So, pop down one colour of Nouveau Vogue Air to show the meeting tables, and pop another Nouveau Apollo down for walkways / other areas.



Want to learn more about it?



[Watch a youtube video](#)

Resistant



Nouveau Vogue Air is made from a tufted loop pile construction, which makes for a heavenly mix of finish and performance. Available in 12 different colours, with a wear class of 33, castor chair rated, and a whopping 15 year guarantee this carpet tiles is perfect for any project. What are you waiting for? Give our lovely sales team a ring!


Stylish and resistant carpet tiles. Do want any better than this?!

Fitting projects

Whether you need to renovate your home or office, or if you are in charge of renovating a schoolroom or airport, DCTUK is here for you! Our fitting teams will take care of everything so your home or workspace will be ready to show off to lots of envious eyes before you know it.

We want to make our customers' life easier; your satisfaction matters most - we're always available at any time by phone call or email. You can see below some projects completed using our very own Nouveau Connections Stripe. Take a look. You won't be disappointed.

New Capital, Willesden

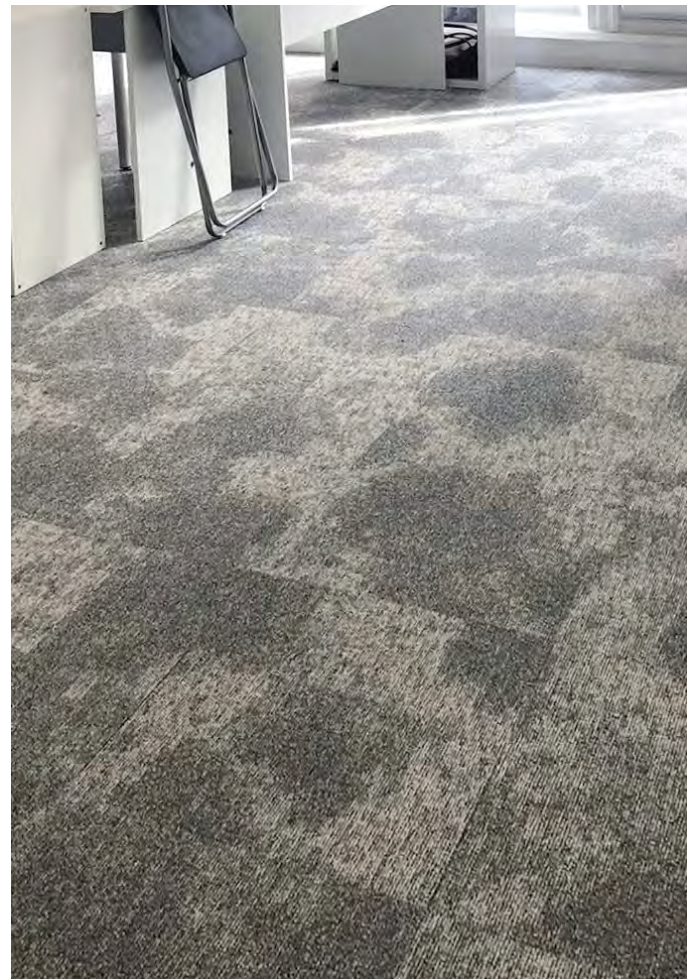

Want to learn more about it?



[Read our webpage](#)

Fitting for the home

What we do


- ✓ Straight lay (all products)
- ✓ Uplift/dispose of existing flooring
- ✓ Recycling of existing flooring
- ✓ Subfloor preparation
- ✓ Evenings & Weekends
- ✓ Cap & cove for vinyl



Fitting for the workplace

What we do

- ✓ Straight lay (all products)
- ✓ Uplift & dispose existing flooring
- ✓ Recycling of existing flooring
- ✓ Moving furniture
- ✓ Subfloor preparation
- ✓ Free design service
- ✓ Free site survey
- ✓ Evenings and weekend work
- ✓ Cap & cove for vinyl
- ✓ Others

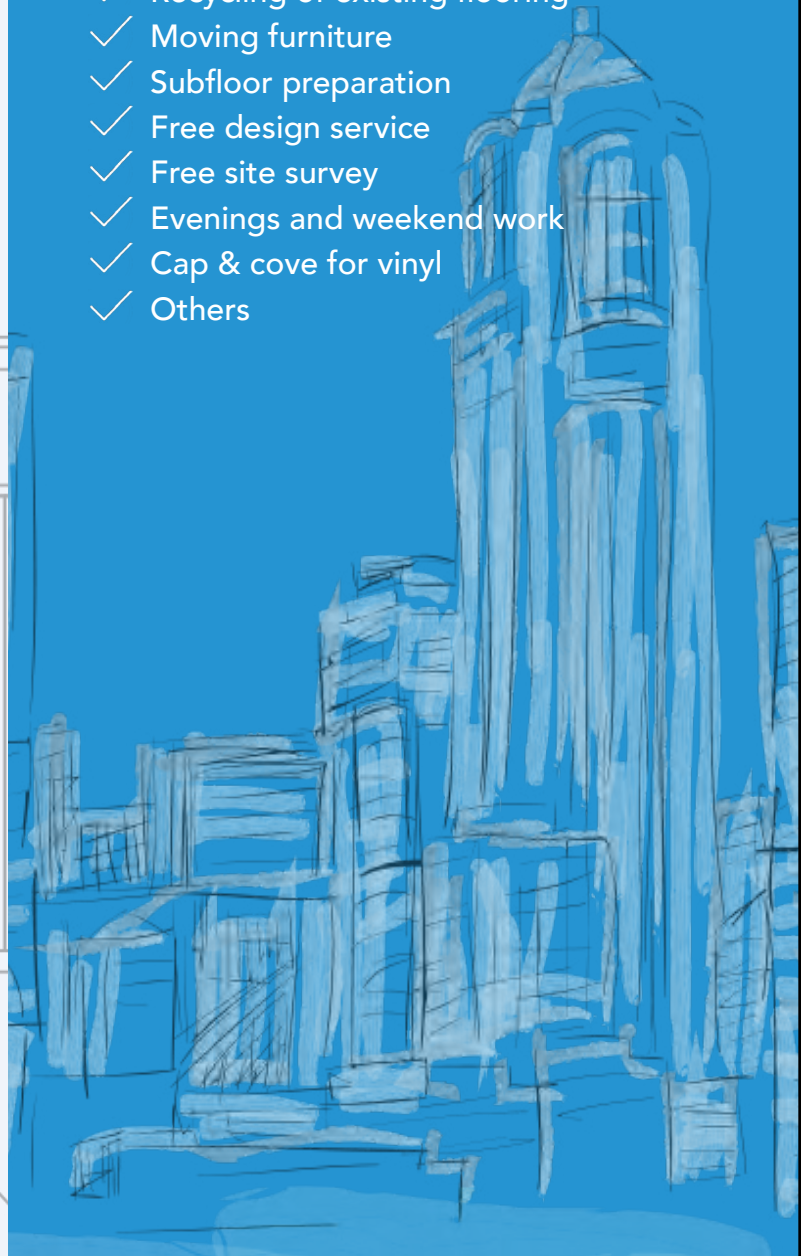

Specifications

1/12" loop pile / 1/12" poil bouclé / 1/12" Schlingenpol / 1/12" lussenpool

PILE MATERIAL
COMPOSITION DU VELOURS
POLMATERIAL
POOLMATERIAAL

100% PA6 Solution Dyed Nylon

SECONDARY BACKING
DOSSIER
RÜCKEN
TAPIJTRUG

Back2Back: Modified bitumen

TOTAL WEIGHT
POIDS TOTAL
GESAMTGEWICHT
TOTAAL GEWICHT

Ca. 4600g/m²

PILE WEIGHT
POIDS DU VELOURS
POLGEWICHT
POOLGEWICHT

Ca. 680g/m²

PILE ABOVE BACKING
POIDS DE VELOURS UTILE
POLNUTZSCHICHTGEWICHT
NUTTIG POOLEGEWICHT

Ca. 420g/m²

TOTAL HEIGHT
HAUTEUR TOTALE
GESAMTHÖHE
TOTAAL HOOGTE

Ca. 6,7mm

PILE HEIGHT
HAUTEUR DU VELOURS
FLORHÖHE
POOLHOOGTE

Ca. 3,3mm

PILE DENSITY
DENSITÉ DU VELOURS
POLROHDICHTE
POOLDICHTHEID

Ca, 0,127g/cm³

TUFT DENSITY
NOMBRE DE TOUFFES
NOPPENZAHL
AANTAL NOPPEN

Ca. 193.000/m²

CLASSIFICATION
CLASSEMENT
KLASSIFIKATION
CLASSIFICATIE

EN 1307 – Class 33

CASTOR CHAIR SUITABILITY
CHAISE À ROULETTES
STUHLROLLENEIGNUNG
ROLSTOELGESCHIKTHEID

EN 985 – A: Continuous use

FIRE RESISTANCE
COMPORTEMENT AU FEU
BRENNVERHALTEN
BRANDGEDRAG

EN 13501 – 1 - Bfl-s1

FASTNESS TO LIGHT
SOLIDITÉ À LA LUMIÈRE
LICHTECHTHEIT
LICHTECHTHEID

ISO 105-B02 - ≥7

RUBBING FASTNESS
SOLIDITE A LA LUMIERE
LICHTECHTHEIT
LICHTECHTHEID

EN ISO 105-X12 - ≥4

COLOUR FASTNESS TO WATER
SOLIDITÉ À L'EAU
WASSERECHTHEIT
WATERECHTHEID

EN ISO 105-E01 - ≥4

THERMAL RESISTANCE
RÉSISTANCE THERMIQUE
WÄRMEDURCHLASSWIDERSTAND
WARMTEDOORLAATWEERSTAND

ISO 8302 - 0.070 m²K/W

IMPACT NOISE RATING
ISOLATION PHONIQUE
TRITTSCHALLVERBESSERUNG
GELUIDSISOLATIE

ISO 10140 - ΔL_w : 42 dB (1000 Hz)

SOUND ABSORPTION
ABSORPTION PHONIQUE
SCHALLABSORPTIONSGRAD
GELUIDSABSORPTIE

ISO 354 - A_w : 0,15

PERMANENTLY ANTISTATIC
ANTISTATIC PERMANENT
PERMANENT ANTISTATISCH
PERMANENT ANTISTATISCH

ISO 6356 - ≤ 2 kV

TRANSVERSAL RESISTANCE
RESISTANCE TRANSVERSALE
DURCHGANGSWIDERSTAND
DOORGANGSWEERSTAND

ISO/DIS 10965 - $\leq 1 \times 10^9$ Ohm

SIZE
DIMENSIONS
ABMESSUNG
AFMETINGEN

50cm x 50cm

DIMENSIONAL STABILITY
STABILITE DIMENSIONNELLE
DIMENSIONSSTABILITAT
DIMENSIONALE STABILITEIT

EN 986 –max 0.2%

LEED®

Product contributes toward
satisfying Credits under LEED®.*





Social Media

 facebook.com/dctuk

 instagram.com/dctukdesign

 youtube.com/dctuk

 twitter.com/dctuk

0345 222 1544
www.dctuk.com