

Nouveau Vogue Fractal



0345 222 1544
www.dctuk.com

Table of content



03

Product features

04

The colours

05

Combinations

06

Resistant

07

Fitting

08

Specifications

Product features

✓ 50cm x 50cm carpet tiles

✓ 11 colours

✓ Stylish linear surface pattern


✓ Nationwide fitting available

✓ Fire resistant properties

✓ Durable Class 33 wear classification

The colours


In a clever combination of colour and design, these innovative carpet tiles are striking a style-savvy balance between old and new that is sure to make an impact in any commercial interior. Each of the 11 classic colourways has an antique, vintage feel that lends a certain sense of nostalgia, while a contemporary linear pattern creates an industrial, deconstructed aesthetic that is just perfect for the modern office.



Beige




Biscuit




Black




Brown




Dark Blue




Grey



Light Grey




Medium Grey



Night



Red Wood




Stone

Combinations

Nouveau Apollo

Block colours are extremely versatile and can be as subtle or as statement as you like but sometimes, you need something a little more exciting, so why not mixing one block colour carpet tile with another one with an irreverant design? Nouveau apollo is available in 6 colours that will look amazing with Nouveau Vogue Fractal.

Ever had that super awkward moment of walking into a meeting thinking it's just a free table? Well, problem solved. Why not use Nouveau Shift to zone out different areas? So, pop down one colour of Nouveau Apollo to show the meeting tables, and pop another colour down for walkways / other areas using Nouveau Vogue Fractal as the colour gradient tiles.

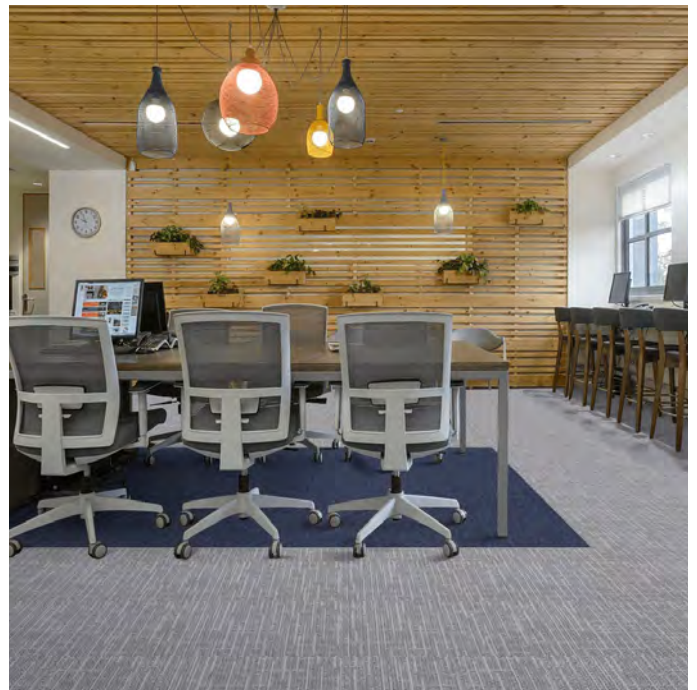

Want to learn more about it?



[Watch a youtube video](#)

Resistant



Nouveau Vogue Fractal is ethically-sourced and 100% recyclable, these stylish tiles are as kind to the environment as they are long-lasting and durable. You will also be pleased to know that this range of premium tiles is also covered by a whopping 15 year guarantee and our own 365 Returns. What are you waiting for? Give our lovely sales team a ring!

Stylish and resistant carpet tiles. Do want any better than this?!

Fitting for the home

What we do


- ✓ Straight lay (all products)
- ✓ Uplift/dispose of existing flooring
- ✓ Recycling of existing flooring
- ✓ Subfloor preparation
- ✓ Evenings & Weekends
- ✓ Cap & cove for vinyl



Fitting for the workplace

What we do

- ✓ Straight lay (all products)
- ✓ Uplift & dispose existing flooring
- ✓ Recycling of existing flooring
- ✓ Moving furniture
- ✓ Subfloor preparation
- ✓ Free design service
- ✓ Free site survey
- ✓ Evenings and weekend work
- ✓ Cap & cove for vinyl
- ✓ Others

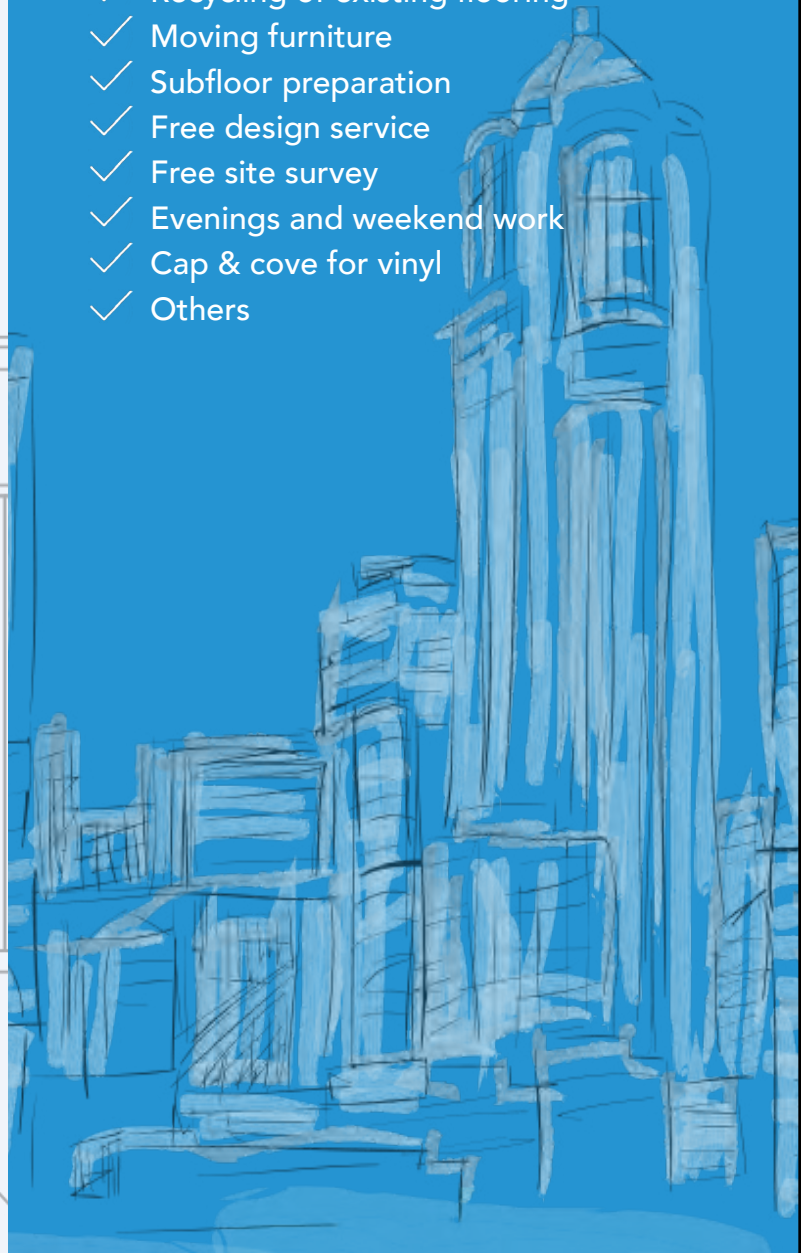

Specifications

1/12" loop pile / 1/12" poil bouclé / 1/12" Schlingenpol / 1/12" lussenpool

PILE MATERIAL COMPOSITION DU VELOURS POLMATERIAL POOLMATERIAAL	100% PA6 Solution Dyed Nylon
SECONDARY BACKING DOSSIER RÜCKEN TAPIJTRUG	Back2Back: Modified bitumen
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4600g/m ²
PILE WEIGHT POIDS DU VELOURS POLGEWICHT POOLGEWICHT	Ca. 680g/m ²
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLEGEWICHT	Ca. 420g/m ²
TOTAL HEIGHT HAUTEUR TOTALE GESAMTHÖHE TOTALE HOOGTE	Ca. 6,7mm
PILE HEIGHT HAUTEUR DU VELOURS FLORHÖHE POOLHOOGTE	Ca. 3,3mm

PILE DENSITY
DENSITÉ DU VELOURS
POLROHDICHTE
POOLDICHTHEID

Ca, 0,127g/cm³

TUFT DENSITY
NOMBRE DE TOUFFES
NOPPENZAHL
AANTAL NOPPEN

Ca. 221.000/m²

CLASSIFICATION
CLASSEMENT
KLASSIFIKATION
CLASSIFICATIE

EN 1307 – Class 33

CASTOR CHAIR SUITABILITY
CHAISE À ROULETTES
STUHLROLLENEIGNUNG
ROLSTOELGESCHIKTHEID

EN 985 – A: Continuous use

FIRE RESISTANCE
COMPORTEMENT AU FEU
BRENNVERHALTEN
BRANDGEDRAG

EN 13501 – 1 - Bfl-s1

FASTNESS TO LIGHT
SOLIDITÉ À LA LUMIÈRE
LICHTECHTHEIT
LICHTECHTHEID

ISO 105-B02 - ≥7

RUBBING FASTNESS
SOLIDITE A LA LUMIERE
LICHTECHTHEIT
LICHTECHTHEID

EN ISO 105-X12 - ≥4

COLOUR FASTNESS TO WATER
SOLIDITÉ À L'EAU
WASSERECHEIT
WATERECHEITHEID

EN ISO 105-E01 - ≥4

THERMAL RESISTANCE
RÉSISTANCE THERMIQUE
WÄRMEDURCHLASSWIDERSTAND
WARMTEDOORLAATWEERSTAND

ISO 8302 - 0.070 m²K/W

IMPACT NOISE RATING
ISOLATION PHONIQUE
TRITTSCHALLVERBESSERUNG
GELUIDSISOLATIE

ISO 10140 - ΔLw: 43 dB (1000 Hz)

SOUND ABSORPTION
ABSORPTION PHONIQUE
SCHALLABSORPTIONSGRAD
GELUIDSABSORPTIE

ISO 354 - Aw: 0,15

PERMANENTLY ANTISTATIC
ANTISTATIC PERMANENT
PERMANENT ANTISTATISCH
PERMANENT ANTISTATISCH

ISO 6356 - ≤ 2 kV

TRANSVERSAL RESISTANCE
RESISTANCE TRANSVERSALE
DURCHGANGSWIDERSTAND
DOORGANGSWEERSTAND

ISO/DIS 10965 - ≤ 1 x 10⁹ Ohm

SIZE
DIMENSIONS
ABMESSUNG
AFMETINGEN

50cm x 50cm

DIMENSIONAL STABILITY
STABILITE DIMENSIONNELLE
DIMENSIONSSTABILITAT
DIMENSIONALE STABILITEIT

EN 986 –max 0.2%

LEED®

Product contributes toward
satisfying Credits under LEED®.*





Social Media

 facebook.com/dctuk

 instagram.com/dctukdesign

 youtube.com/dctuk

 twitter.com/dctuk

0345 222 1544
www.dctuk.com