



Nouveau ColourCord

dctuk.com

0333 272 2971
www.dctuk.com

Table of content



03

Product features

04

The colours

05

Resistant

06

Certifications

07

Fitting Projects

09

Specifications

Product features

✓ 50cm x 50cm carpet tiles

✓ 80% polypropylene
20% Polyester

✓ Ideal for commercial
spaces

✓ Durable and easy to
maintain

✓ 10 year guarantee


✓ Manufactured in the UK

✓ Delivered 1-2 days


✓ 26 colours available

The colours

The Nouveau ColourCord range is the perfect way to transform your commercial space and/or workplace without breaking the bank. These amazing carpet tiles are available in 26 colourways and they are delivered in 1-2 days!




Apple




Aquamarine



Barley




Coastlines




Cosmos




Emerald



Firecracker




Forest




Galaxy




Helium




Hillside




Midnight Sky




Oak




Orangeade



Pacific




Peacock



Rock Pool




Seaweed




Silver Lining



Spaceship



Starry Night




Straw




Supernova



Superstar




Ultraviolet



Volcanic

Resistant

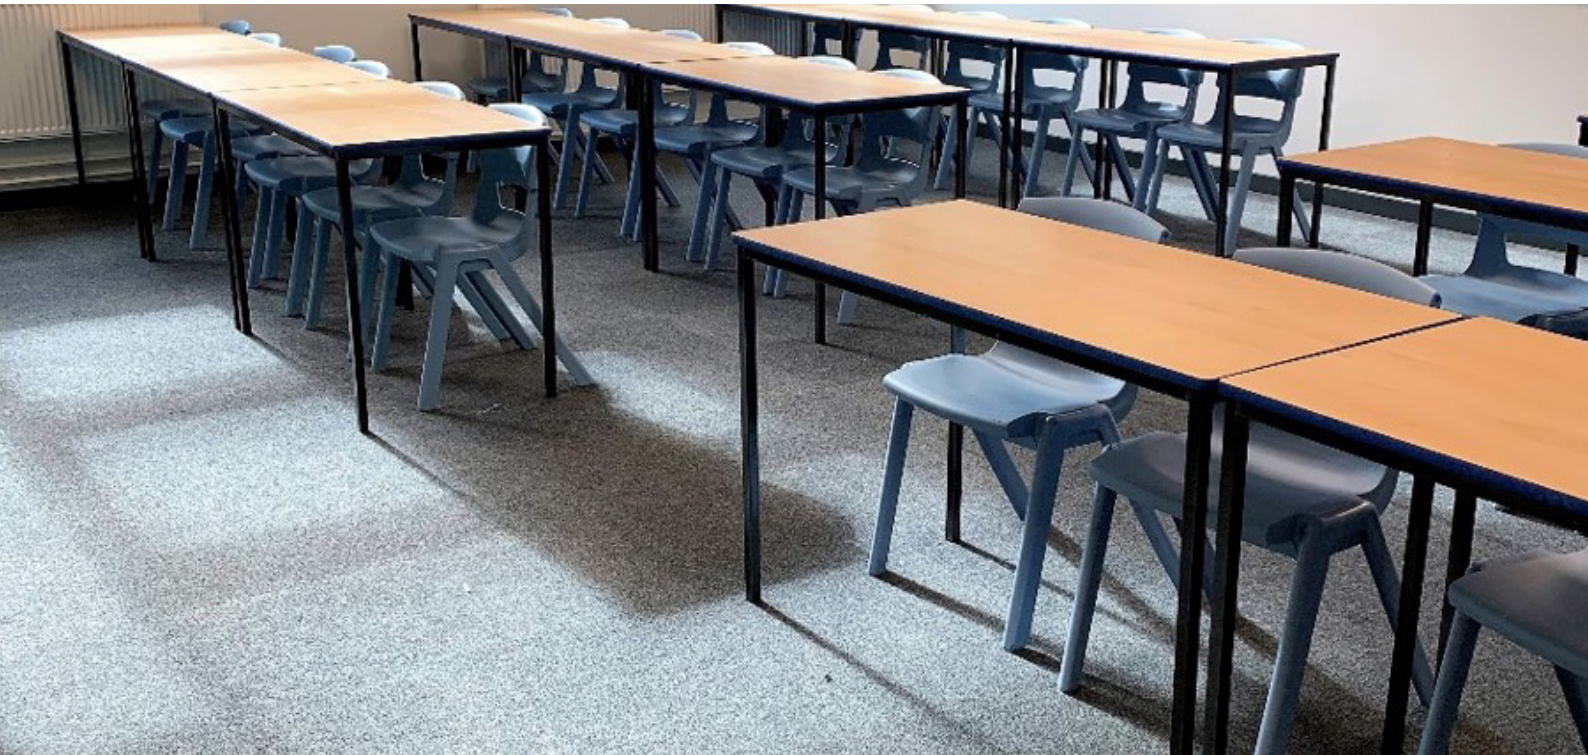

It's time to give your space a fresh new look with a pop of colour! These carpet tiles are 50cm x 50cm and made of 80% polypropylene and 20% Polyester - so you know they're tough enough to handle whatever your throw at them! Not only will they give your space a killer new look, but with their super strong fibre-bonded construction and thickness of 6.7mm, Nouveau ColourCord carpet tiles are ready to shake up your space!

**Affordable and resistant.
Do you want any better than
this?!**

Certifications



Manufactured in the U.K. Nouveau ColourCord passes all EU certifications including fire resistant. Plus it has a 10 year guarantee and because it's 80% polypropylene and 20% Polyester, it has dimensional stability to heat and water. Perfect for any commercial environment, these tiles are delivered fast and fitted by our amazing fitting team, so what are you waiting for?

**Stain resistant and durable
against heavy foot-traffic!**

Fitting for the workplace

What we do

- ✓ Straight lay (all products)
- ✓ Uplift & dispose existing flooring
- ✓ Recycling of existing flooring
- ✓ Moving furniture
- ✓ Subfloor preparation
- ✓ Free design service
- ✓ Free site survey
- ✓ Evenings and weekend work
- ✓ Cap & cove for vinyl
- ✓ Others




Specifications


PILE MATERIAL COMPOSITION DU VELOURS POLMATERIAL POOLMATERIAAL	80% polypropylene 20% Polyester
SECONDARY BACKING DOSSIER RÜCKEN TAPIJTRUG	Bitumen
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 4150g/m ²
PILE WEIGHT POIDS DU VELOURS POLGEWICHT POOLGEWICHT	Ca. 930g/m ²
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLEGEWICHT	N/A
TOTAL HEIGHT HAUTEUR TOTALE GESAMTHÖHE TOTAAL HOOGTE	Ca. 6.7mm
PILE HEIGHT HAUTEUR DU VELOURS FLORHÖHE POOLHOOGTE	N/A

PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	N/A
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL NOPPEN	N/A
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	N/A
CASTOR CHAIR SUITABILITY CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	PASS
COLOUR FASTNESS: SHAMPOO SOLIDITE DE LA COULEUR : SHAMPOOING FARBECHT: SHAMPOO KLEURVASTHEID: SHAMPOO	Grade 5
COLOUR FASTNESS: LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	Grade 6 (8 max.)
COLOUR FASTNESS: RUB SOLIDITÉ DE LA COULEUR : RUB FARBECHTHEIT: RUB KLEURWAARHEID: Wrijven	Grade 5
COLOUR FASTNESS: WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	Grade 5

THERMAL CONDUCTIVITY CONDUCTIVITÉ THERMIQUE WÄRMELEITFÄHIGKEIT WARMTEGELEIDING	N/A
IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNG GELUIDSISOLATIE	N/A
SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	N/A
PERMANENTLY ANTISTATIC ANTISTATIC PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	PASS
TRANSVERSAL RESISTANCE RESISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	N/A
SIZE DIMENSIONS ABMESSUNG AFMETINGEN	50 x 50cm
PACKAGING EMBALLAGE VERPACKUNG VERPAKKING	5m ² per box - : 20 tiles
DIMENSIONAL STABILITY STABILITE DIMENSIONNELLE DIMENSIONSSTABILITAT DIMENSIONALE STABILITEIT	N/A



F512/02
M01 /17





dctuk.com

Social Media

 facebook.com/dctuk

 instagram.com/dctukdesign

 youtube.com/dctuk

 twitter.com/dctuk

0333 272 2971
www.dctuk.com