




Installation Method

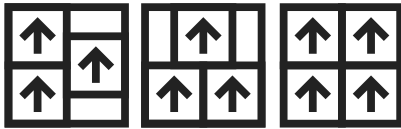

Ashlar

Brick

Monolithic

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see www.interface.com/disclaimer.

Product In The Mix **Colour** Cavern

Product Specifications

| | |
|----------------------|---|
| Product Number | A039 |
| Product Construction | High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content |
| Finish | Ceramor+™ UV stabilised Ceramic Bead Coating |
| Wear Layer Thickness | (EN ISO 24340) 0.55 mm |
| Total Thickness | (EN ISO 24346) 4.5 mm |
| Total Weight | 6,320 g/m ² |
| Size | 50cm x 50cm |
| Tiles per Box | 10 - 2.5m ² |
| Backing | Sound Choice+™ Acoustic Backing |

Performance Specifications

| | |
|--|--|
| Wear Classification | EN ISO 10874 33 Heavy Commercial / 42 General Light Industrial |
| CE Declaration Of Performance | MOC2024-0087 |
| UKCA Declaration of Performance | MOC2024-0087 |
| Castor Chair Rating | (ISO 4918 / EN425) Pass |
| Flammability | (EN ISO 9239-1: 2010) Euroclass Bfl-s1 (EN 13501-1) |
| Light Fastness | ≥6 (ISO 105-B02) |
| Light Reflectance Value (LRV-L) | 52.51 |
| Light Reflectance Value (LRV-Y) | 20.60 |
| Curling | ≤ 2 mm (ISO 23999) |
| Flexibility | (EN ISO 24344) Method A - Pass |
| Abrasion Resistance | (EN 660-2) Group T |
| Residual Indentation | (EN ISO 24343-1) ≤ 0.2 mm |
| Determination of Anti-Slip | R10 (EN 16165 - Annex B) |
| Pendulum Wet & Dry 4S | 36+ Low slip potential (EN 16165 - Annex C) |
| Chemical Resistance | (EN ISO 26987) Very Good |
| Impact Sound Insulation ΔLw EN ISO 10140-3 | Upto 19 dB |

Environmental Specifications

| | |
|-----------------------------------|---|
| Environmental Product Declaration | Download EPD |
| Disclosure of Product Ingredients | Health Product Declaration |
| Total Recycled Content | 39 % |
| Indoor Air Quality | French A+ Indoor Air Comfort GOLD® LVT Greenguard Gold M1 Emission Certification - LVT FloorScore® SCS-FS-04366 |
| Embodied Carbon (Cradle to Gate) | 6.8 kg CO ₂ eq./m ² |
| Fully Recyclable | Can be recycled into carpet tile backing. |
| Material Composition | Free of Ortho Phthalates |

Technical Information

| | |
|--------------|---|
| Installation | See recommended LVT installation guidelines |
| Maintenance | See recommended LVT maintenance guidelines |
| Warranty | 15 years LVT |

Certifications

