

PAINTED GARDEN



Construction	Tufted, Luxury Textured Loop Pile
Face Fibre	ECONYL® 100% recycled Nylon
Soil Release	StainSmart® for soil release
Finished Face Weight	1010 g/m ²
Gauge	47.2 / 10 cm
Rows	44.0 / 10 cm
Tuft Density	207,874 /m ²
Finished Pile Height	5.3 mm
Standard Backing	WellBAC® Comfort Plus 90% Recycled Polyurethane cushion. Available with TractionBack® on request
Nominal Total Thickness	12.1 mm
Plank Size	25 cm x 100 cm
Nominal Total Weight	5000 g/m ²
Planks per Box	8 (2m ²)

PERFORMANCE

Flammability (Euroclassification EN13501:1-2018)	Class Cfl - s1
Flammability (Radiant Panel ASTM-E-648)	Class 1
Flammability (Hot Metal Nut BS4790)	Low Radius of Char
Use Classification (EN 1307)	Class 33 Heavy Commercial Use
Castor Chair (BS EN 985:2001)	Class A - Intensive use (r value ≥ 2.4)
Static Electricity (ISO 6356)	Pass ≤ 2.0 KV Permanent Conductive Fibre
Impact Sound (ISO 10140-3)	37 dB ΔL _w
Sound Absorption (ISO354)	0.35 Class D
Alpha p values	125Hz 0.00, 250Hz 0.15, 500Hz 0.40, 1000Hz 0.25, 2000Hz 0.40, 4000Hz 0.50

ENVIRONMENTAL

70% recycled content by total product weight

Manufactured in ISO14001 certified location using renewable sources

M/PACT Carbon Neutral Floors,
5.71 kg CO₂ e/m² Embodied Carbon (EPD calculation A1-A3)
Cradle to Gate footprint 100% off set

WARRANTIES

15 year wear warranty

Lifetime Antistatic guarantee


Latent Defects guarantee

CERTIFICATIONS

www.millikenfloors.com/gb/tech



INSTALLATION

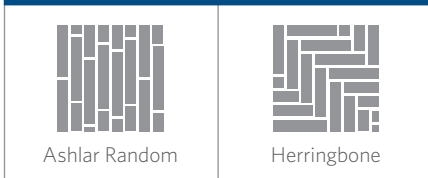

CE / UKCA

