


Etrusco xf²™ (2.5 mm)

Datasheet

Classification	Norm	Tarkett Value	Requirement
Product type	ISO 24011	Plain and decorative linoleum	
Domestic classification	EN ISO 10874	23 Heavy	
Commercial classification	EN ISO 10874	34 Very Heavy	
Industrial classification	EN ISO 10874	43 Heavy	
Characteristics	Norm	Tarkett Value	Requirement
Surface treatment		xf ² ™	
Total thickness	ISO 24346	2.50 mm	
Total weight	ISO 23997	2900 g/m ²	
Flexibility	ISO 24344 Method A	≤ 30 mm ø Average measured value : 17,5 mm ø	
Performance for CE Marking	Norm	Tarkett Value	Requirement
CE Marking	EN 14041	EN 14041	
Declaration of Performance	EN 14041	0200 0001 DoP 2013 07	
Reaction to fire - Glued on non-combustible substrate	EN 13501-1	Cfl-s1	
Slip resistance (DIN 51130)	DIN 51130	R9	
Slip resistance (EN 13893)	EN 13893	Class DS (μ ≥ 0.30)	
Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)	≤ 2 kV
Thermal conductivity (W/m K)	EN ISO 10456	0.17	
Technical Performance	Norm	Tarkett Value	Requirement
Residual indentation	EN ISO 24343-1	≤ 0,15 mm Average measured value: 0,08 mm	
Impact sound reduction - ΔLw	EN ISO 10140-3 / 717-2	6 dB	
Drum sound class	NF S31-074	C	
Castor chair effect	EN ISO 4918	Suitable for office chairs with castors type W (Norm EN 12529)	
Chemical resistance	ISO 26987	Resistant to dilute acids, oils, facts, current solvents and alkalis	
Underfloor heating		Suitable (subfloor temperature maximum 27°C)	
Colour fastness to light	ISO 105-B02	≥ 6	≥ 6
Antibacterial activity	ISO 22196	Naturally antibacterial (Bacteria mix - Ecoli and MRSA)	
Sustainability, Environment & Indoor Air Quality	Norm	Tarkett Value	Requirement
Recyclable		Yes - offcuts and post-use through ReStart® (ISO 14021)	
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		-0.60 kg CO ₂ e /m ²	
Total recycled content		36 %	
TVOC emissions after 28 days	EN 16516	Platinum (≤ 10 μg/m ³)	
Dimensions and designs			
Roll		Roll 2 x ≤32m	
Number of designs available		16	

Impact sound reduction with Elafono* - ΔLw (EN ISO 10140-3 / 717-2) : 14dB

*Elafono : 2,0mm traditional, 100% natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to 15dB, depending on the product).

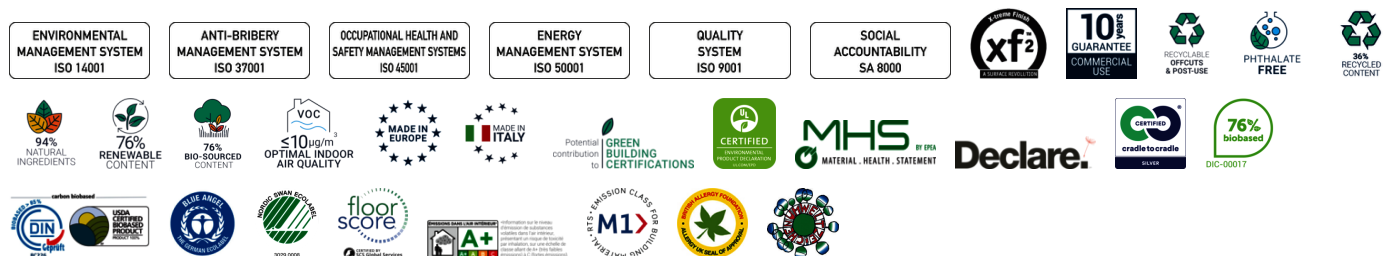

The above information is subject to modification for the benefit of further improvement (27/09/2025). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com> Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.